



BAKKEN HIGHER RATE ROD PUMPING CONFIGURATION
SC2000 XPR COMPLETION WITH
API RHBM BOTTOM HOLDDOWN PUMP
INTAKE PROTECTION, GAS ANCHORED
 STREN INC - HOUSTON MFG PLANT

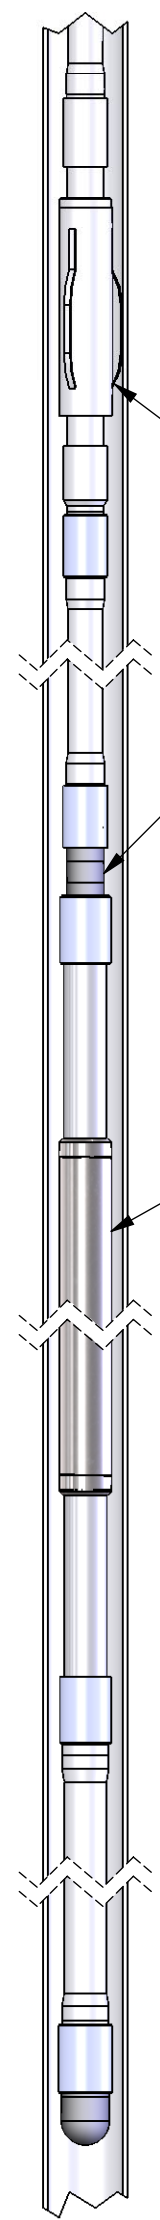

TUBING ANCHOR
SET _____ FT


API SEATING NIPPLE

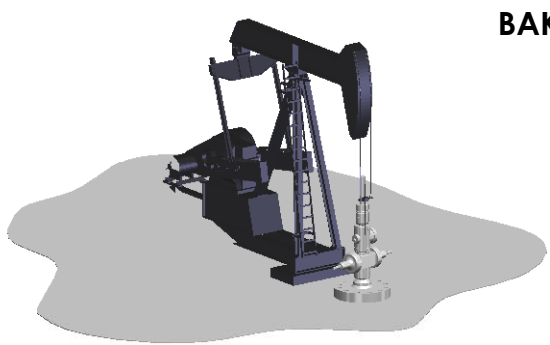

XPR CAPACITY RATING
 FOR AVERAGE CONDITIONS USE 1 FT PER 10-15 BFPD
 (USE AS MANY 15 FT OAL UNITS AS REQUIRED FOR CAPACITY)



TECHNOLOGY FOR COMPLETIONS
 HOUSTON TEXAS



API SEATING NIPPLE

CASING

3-1/2 EU TUBING TAIL JOINT
 R2 BULL PLUGGED
 (PROVIDES FOR HIGHER RATE
 GAS SEPARATION & PUMP
 NO-GO SCRAPINGS TO SUMP)

PRODUCTION TUBING

PUMP: (EXAMPLE)
 API 25-____-RHBM
 _____" STROKE
 HIGH COMPRESSION
 CONFIGURATION

XPR30 COMPLETION

GAS ANCHOR DIP TUBE
 1-1/4" NPT x _____"
 YIELDS 1 PUMP
 DISPLACEMENT

BULL PLUG
 DEPTH _____ FT