

Hydraulic Pump Power Fluid HP Filtration

1440 PSI HSL Series Bag Filtration Unit



- FITS INDUSTRY STANDARD #2 FILTER BAGS
- INLET/OUTLET:
2" #600 RFWN
- DRAIN:
¾" NPT #3000 COUPLING
- VENT:
½" #3000 NPT COUPLING
- DP Ports:
2 QTY ½" NPT #3000 COUPLING

MICRON SELECTION


Micron ranges 10, 25, and 2-stage 25/10 double layer duty bags available for field operation.

DIFFERENTIAL INDICATOR

Can be supplied with factory installed pressure differential indicator for bag replacement.

System Features and Benefits

- Clean power fluid is key to pump life. Circulating silt in the power fluid is just like circulating grinding compound through the downhole pump.
- We manufacture an ANSI 600/1440 PSI rated filter bag assembly to place AFTER the triplex power fluid pump. This has the benefit of not affecting power fluid pump suction side performance by having to draw through the bag filter unit. High pressure units available upon request.

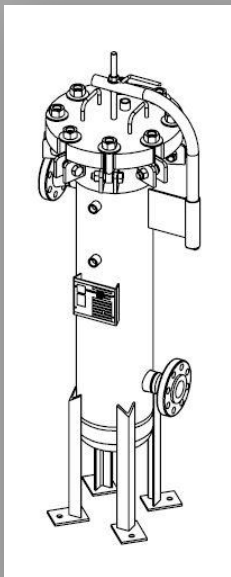

419 Century Plaza Drive
Houston, TX 77073-6028
281-951-3000 PH
281-820-5909 FX
[Sales @stren.net](mailto:Sales@stren.net)